

The
**Patent
Office**

21 MAY 2004

LONDON

24MAY04 E898005-1 001038
P01/7700 0.00-0411436/5 CHEQUE

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

P711347GB/AJC/52318

2. Patent application number

(The Patent Office will fill in this part)

21 MAY 2004

0411436.9

3. Full name; address and postcode of the or of each applicant (underline all surnames)

WABCO Automotive U.K. Limited
Beacon Works
Texas Street
Morley
Leeds
LS27 OHQ
United Kingdom

05951231002

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

England and Wales

4. Title of the invention

Improvements in Air Dryers

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS
Goldings House
2 Hays Lane
London
SE1 2HW

Patents ADP number (if you know it)

1776001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

BEST AVAILABLE COPY

Patents Form 1/77

- Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -
Description 5
Claim(s) -
Abstract -
Drawing (s) 1 ~~1~~

C 32

10. If you are also filing any of the following, state how many against each item.

Priority documents -
Translations of priority documents -
• Statement of inventorship and right to grant of a patent (Patents Form 7/77) -
Request for preliminary examination and search (Patents Form 9/77) -
Request for substantive examination (Patents Form 10/77) -
Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application.

Signature  Date 20/05/2004

12. Name and daytime telephone number of person to contact in the United Kingdom Adrian J Chettle 01926 336111

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

Improvements in Air Dryers

This invention relates to air dryers for the braking systems of heavy commercial vehicles.

5

Commercial vehicles, such as large trucks, buses and the like, generally use compressed air as a medium for actuating the wheel brakes. An engine driven compressor provides air under pressure to a reservoir, from which it is directed to wheel brake actuators via a driver actuated foot valve. In order to avoid moisture in the braking system, which may

10

cause corrosion, an air dryer is usually provided upstream of the reservoir.

The typical air dryer comprises a canister of desiccant downstream of the compressor, and through which compressed air is directed to the reservoir. Gradually the desiccant becomes loaded with moisture, and it is periodically regenerated by expanding a small

15

volume of compressed dry air through the canister in reverse. Replaceable canisters are preferred in order to permit substitution of desiccant at the recommended service interval.

The specified volume of desiccant is somewhat dependent on the ambient moisture content of air, and the rate of air consumption of the vehicle. Accordingly a range of desiccant canisters of different volume may be provided, from which the vehicle manufacturer will select the most appropriate for the conditions of use. Furthermore, the desiccant canister may include a special feature, such as an oil trap.

20

However for reasons of economy and interchangeability, the manufacturers may wish to utilize a generally common mounting for the desiccant canister, and the problem arises of how to ensure that the correct canister is fitted to the vehicle, especially at the time of service exchange.

25

It is known to provide a special mating arrangement to ensure fitment of appropriate components, typically by suitable plug and socket connection. However this

30

arrangement may be unsuitable if removal of a male feature permits a female feature to nevertheless adopt the intended location.

Thus a conventional screw on desiccant canister has a central screw thread. If an
5 upstanding post is provided on the mounting side at a distance from the screw thread, it will prevent attachment of a canister unless it also has a annular recess corresponding to the post. Nevertheless removal of the post, for example by sawing it off, may permit any canister to be attached.

- 10 What is required is a simple mechanical device capable to adaptation to a common mounting body, and which indicates incorrect assembly.

According to the invention, there is provided an air dryer for an air braking system of a
~~vehicle, the air dryer comprising a mounting, and a removable desiccant canister~~

- 15 screw-threaded to said mounting about a spin axis and having a peripheral sealing ring, wherein the mounting includes an upstanding protrusion radially spaced from said axis and adapted to engage an annular recess of said canister within said ring, said protrusion being hollow, and the interior of said protrusion being connected to a vent for air under pressure in the system.

20

In such an arrangement, the protrusion and recess co-operate to ensure mating of a correct canister. Any removal of the protrusion exposes the interior space to air under pressure within the canister, which can be directed to vent directly, or to actuate a vent valve of the system. In either case air under pressure will escape from the system and
25 make a noise. Furthermore the escape may prevent a build-up of pressure in the braking system.

- In a preferred embodiment the mounting includes a vent passage closed at one end by said protrusion and open at the other end to atmosphere. The protrusion may consist of
30 a cylindrical pin having a blind bore and adapted to be pressed into a counterbore of said vent passage.

In the alternative the vent passage may open at the other end into an actuation chamber of a vent valve of the braking system. In this embodiment, air pressure in the vent passage acts as a pilot signal for the vent valve, which may for example be in the form of a piston.

5

The vent valve may for example be a drain valve adapted to be opened to exhaust the air braking system, or the usual regeneration valve which isolates the compressor whilst connecting the air dryer inlet to atmosphere.

10 Other features of the invention will be apparent from the following description of a preferred embodiment illustrated by way of reference only in the accompanying drawings in which:-

~~Fig. 1 is an elevation of a conventional cylindrical desiccant canister;~~

15

Fig. 2 is an axial section through a canister end plate for the invention, and

Fig. 3 is a partial axial section through a canister mounting of the invention.

20 With reference to the drawings, Fig. 1 illustrates a conventional replaceable desiccant canister 10. The internal structure of the canister is not important, but a flow path is defined from an inlet to an outlet by an internal partition and end plate 12 (Fig. 2).

Fig. 3 illustrates part of a valve body 20 which includes a mounting for the canister 10
25 comprising a hollow male screw thread 21.

The mounting 20 includes a generally flat annular face 22 from which the male thread 21 projects to define an outlet passage 23. An annular recess 24 co-axial about the thread axis 25 is connected to an inlet passage 26. A pressure vent passage 27 is closed
30 at the face 22 by an upstanding cylindrical plug 28 having a blind internal bore, and which is pressed into a counterbore of the passage 27 as illustrated.

The end plate 12 includes a central female threaded hole, and is the means by which the canister spins onto the mounting 20 about axis 25.

5 Co-axial annular grooves retain sealing rings 13,14 which compress to seal the inlet passage 26 from the outlet passage 23, and the inlet passage 26 from the exterior. The canister outlet 15 is defined by the threaded hole, and the inlet by one or more through passages 16 adapted to align with the recess 24.

10 Another co-axial groove 17 is aligned with the plug 28, as illustrated, and is connected to the inlet passage 16 by a relief groove 18.

It should be understood that the figures are somewhat schematic, and certain dimensions and shapes are exaggerated in order to best illustrate the invention.

15 In use the canister 10 is spun fully onto the mounting 20, and the sealing rings 13,14 ensure leaktight connection. Compressed air is passed through the desiccant, and thereby dried, and periodically dry air is used to regenerate the desiccant. This reverse flow passes to atmosphere through a conventional valve, which is not shown.

20 Replacement of the canister 10 requires simple unscrewing of the used component, and attachment of a new one.

25 The groove 17 provides an identifying feature for the correct replacement. If the groove 17 is not present, the plug 28 will prevent complete screwing-on of the canister, and the inlet passage 26 will not be sealed. Accordingly the braking system will not pressurize and the usual warning buzzer will sound in the drivers cab. Additionally the operator will be alerted by the sound of a large air leak in the vicinity of the cartridge.

30 If the operator attempts to remove the plug 28, the canister will screw on fully, but the inlet passage 16 will connect to the vent passage 27 via the relief groove 18.

The vent passage 27 may be connected to atmosphere, and accordingly the braking system will not pressurize sufficiently or at all, and as noted above, the buzzer will sound, and an air leak will be apparent. The vent passage 27 may be directed to a whistle or the like.

5

Alternatively, the vent passage 27 may be connected to operate the usual regeneration valve, or to a drain valve whereby a piston moves to open the inlet passage 26 to atmosphere.

- 10 Thus the upstanding plug 28 provides an obstruction to attachment of an incorrect canister, and a fail-safe indicator in the event of tampering.

The illustrated embodiment is schematic, and many kinds of upstanding plugs are possible. ~~Such a plug may be threaded, or formed integrally with the mounting 20. By~~

- 15 adjusting the radius of the plug, or by providing several such plugs, it is possible to customize a common mounting to several sizes or kinds of desiccant canister.

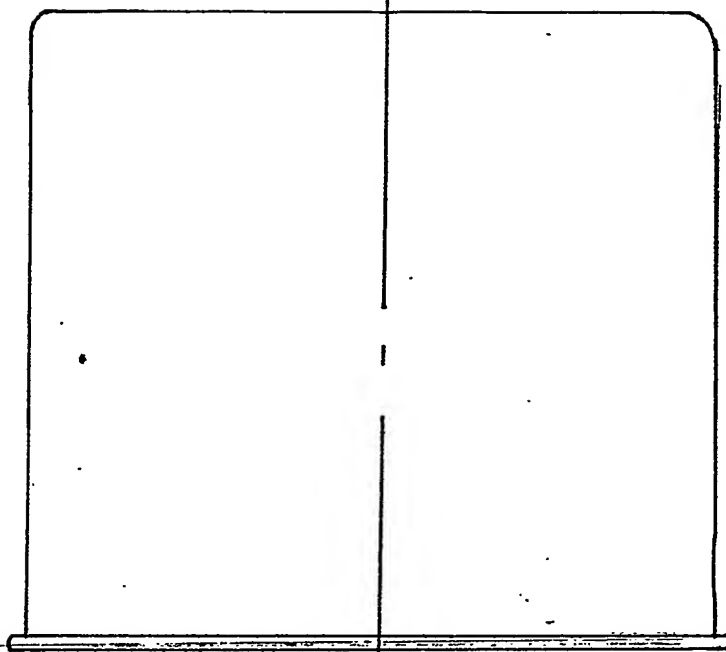


Fig 1

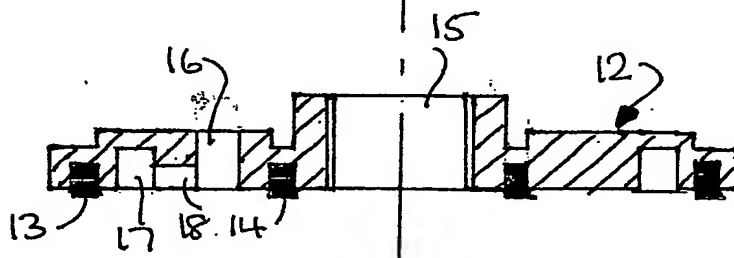


Fig 2

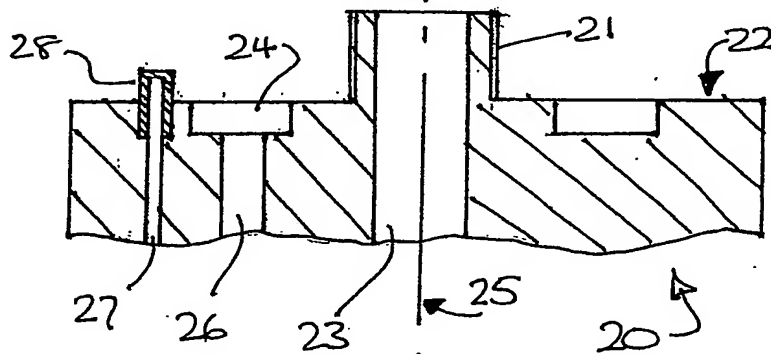


Fig 3

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/001744

International filing date: 06 May 2005 (06.05.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0411436.9
Filing date: 21 May 2004 (21.05.2004)

Date of receipt at the International Bureau: 13 June 2005 (13.06.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.